

482870.01 & 492335 "NEMA"
ELECTRICAL PARTS "IS" 50 mm

These coils can be mounted with every Parker ATEX solenoid valves corresponding to the specified Coil Group.

See column "Coil Group" within valve pages.

Application: Control of solenoid valves in dangerous areas where an explosion-proof protection Ex ia IIC or IIB T6 is required.


Benefits: Rotatable 360° housing, polyamid with fibreglass housing and cover. Coil, electronic circuits and other elements required for intrinsic safety are completely encapsulated in the housing with epoxy material for shock and corrosion protection.

Small size for ease of mounting in confined space.



Reference			482870.01	492335
Certificate			LCIE 02 ATEX 6024 X	LCIE - FM - CSA
Coil Group			12,0	
Type of protection	Gas	II 1 G - Ex ia IIC - T6		Cl. I, Div.I, Gr. A, B, C, D Cl. II, Div.I, Gr. E, F, G
	Dust	II 1 D - Ex ta IIIC - T80°C		
Degree of protection			IP66	NEMA 4 - 4X
Ambiant temperature			- 40°C to +65°C	+60°C
			The application is limited also by the temperature range of the valve.	
Electrical connection			Cable connection through a stainless steel cable gland M20 x 1.5 allowing use of cable diameter from 10 to 12 mm. Additional earth connection possible with external screw terminal.	
Maximum supply voltage			28 VDC (N7) - 280 mA	30 VDC (N7) - 100 mA
Power	DC	Minimum	300 mW	
		Maximum	3 W	
			Depending on applied voltage, IS barrier type and resistance of connected cable	
Coil resistance at 20°C			295 Ω	
Impedance			345 Ω	
Apparent inductance			0 mH	
Apparent capacitance			0 μF	
Weight			500 g	


To Order a Coil choose Coil Ref + Voltage Code, example: 492335 for 30VDC = 492335N7

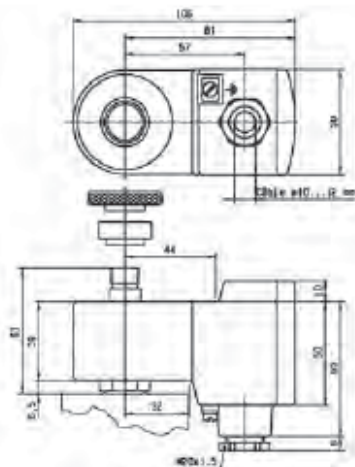

Important

The intrinsic safety supply circuit must have sufficient capacitance in all ambient conditions to guarantee a minimum operating current in excess of 29 mA across the coil.

The minimum current for holding in the energised position is 20 mA



For the barrier compatibility see the corresponding table in appendix section.